# A METHOD TO DISABLE
# E32 DEADBOLT LOCK FUNCTION

Feb 9, 2022  by E32FAN

The E32 DEADBOLT LOCK function is not our friend. To prevent this from operating in your door lock motors, you can break off PIN 14 of the BLK X258 connector on the RM module, under the rear seat.

This will prevent any current from flowing in the BLK wire of the Door Lock Motors.

Here I have drilled out PIN 14 (not so easy) but you can just break off the pin using needlenose pliers.

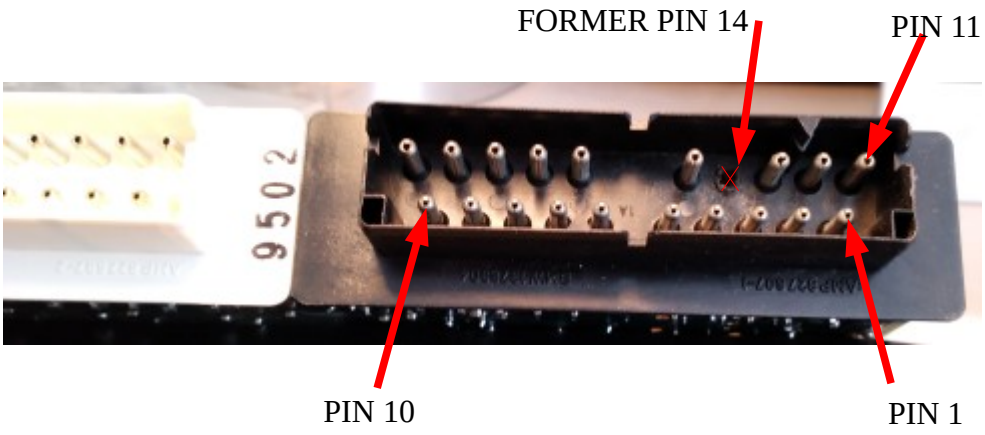

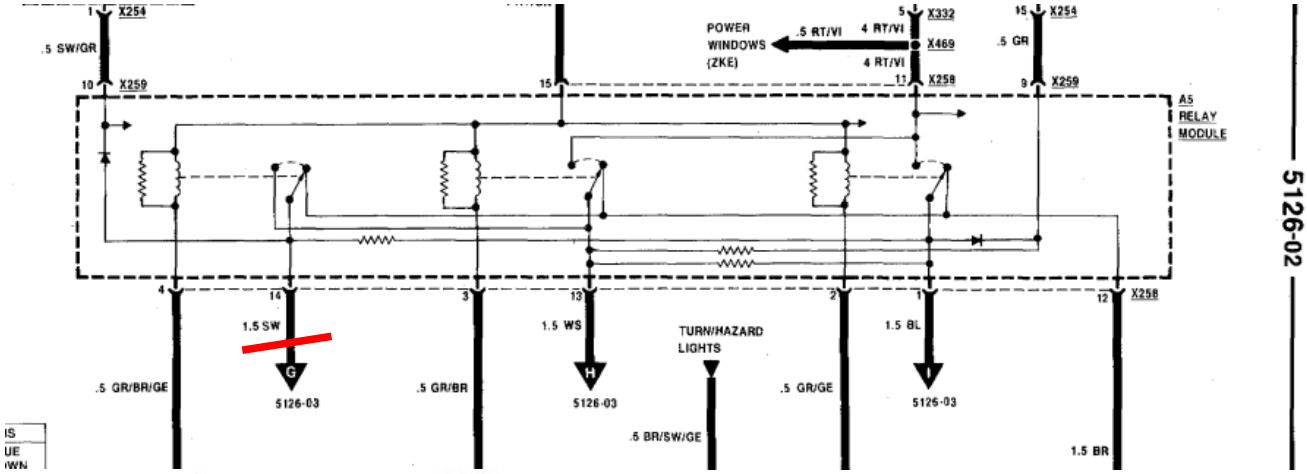
X254
.5 SW/GR
X259
POWER WINDOWS (ZKE)
.5 RT/VI
4 RT/VI
X332
X469
X258
.5 GR
A5 RELAY MODULE
1.5 SW
.5 GR/BR/GE
5126-03
.5 GR/BR
1.5 WS
TURN/HAZARD LIGHTS
.5 BR/SW/GE
.5 GR/GE
1.5 BL
1.5 BR

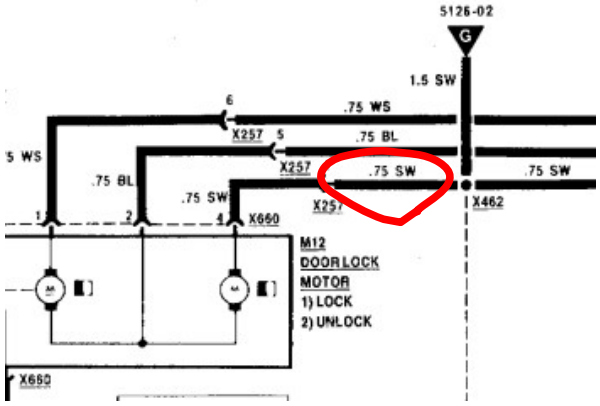
5126-02
1.5 SW
.75 WS
X257
.75 BL
.75 SW
X660
X462
M12
DOOR LOCK MOTOR
1) LOCK
2) UNLOCK